#### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization

International Bureau



# ! CONTRACTOR OF CONTRACTOR

#### (43) International Publication Date 6 May 2005 (06.05.2005)

#### **PCT**

### (10) International Publication Number WO 2005/041226 A1

(51) International Patent Classification7: H01G 9/08, 9/00

(21) International Application Number:

PCT/JP2004/016385

(22) International Filing Date: 28 October 2004 (28.10.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

29 October 2003 (29.10.2003) 2003-369034 2003-369036 29 October 2003 (29.10.2003) JP 4 November 2003 (04.11.2003) 60/516,766 US 60/516,834 4 November 2003 (04.11.2003) US 2003-426354 24 December 2003 (24.12.2003) Љ 2003-426356 24 December 2003 (24.12.2003) ЛР


- (71) Applicant (for all designated States except US): SHOWA DENKO K. K. [JP/JP]; 13-9, Shiba Daimon 1-chome, Minato-ku, Tokyo 105-8518 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): TAKE, Koichiro

[JP/JP]; c/o Oyama Regional, Showa Denko K. K., 480, Inuyuka 1-chome, Oyama-shi, Tochigi 323-8678 (JP).

- (74) Agents: SHIMIZU, Hisayoshi et al.; Idemitsu Nagahori Building, 4-26, Minamisemba 3-chome, Chuo-ku, Osakashi, Osaka 542-0081 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTROLYTIC CAPACITOR

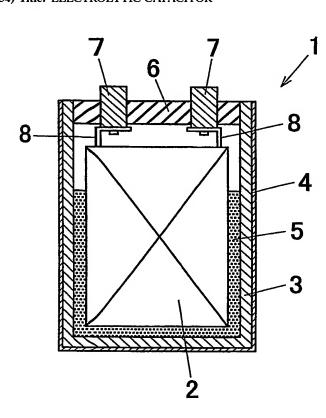

(57) Abstract: In an electrolytic capacitor 1 in which a capacitor element 2 is enclosed in an external casing 3, a heat conductive material 5 having heat conductivity of 1 W/m•K or more is disposed between the external casing 3 and the capacitor element 2 so as to be in contact with them. Alternatively, in an electrolytic capacitor 1 in which a capacitor element 2 is enclosed in an external casing 3 made of aluminum, an external peripheral surface of the external casing 3 is covered with an insulation film 4.

